



# Double Sided Fireplace


- VFDS 800/1000 -

The Double Sided Fireplace is ideal for heating up a space in the home where a dividing wall separates two areas or rooms.


Available in two sizes and multiple finish options, the Double sided Fireplace is the perfect fit when creating two feature areas that share a common wall.

The Double Sided 800 and 1000 is capable of heating a combined area of 108m<sup>2</sup> and 131m<sup>2</sup> respectively.


SIDE



FRONT

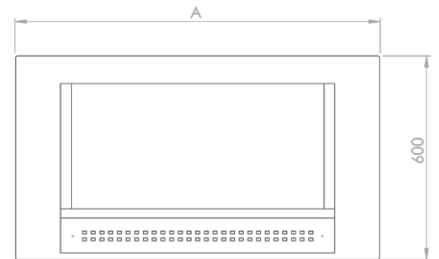

TOP

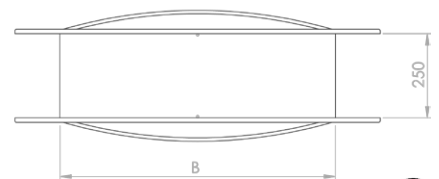

MODEL	SIZE (A)	SIZE (B)
VFDS-800	1070	810
VFDS-1000	1220	980



SAFETY, STYLE & QUALITY THAT LASTS


**CHAD-O-CHEF**  
Lifestyle products

Since 1983



# Double Sided Fireplace

- VFDS 800/1000 -

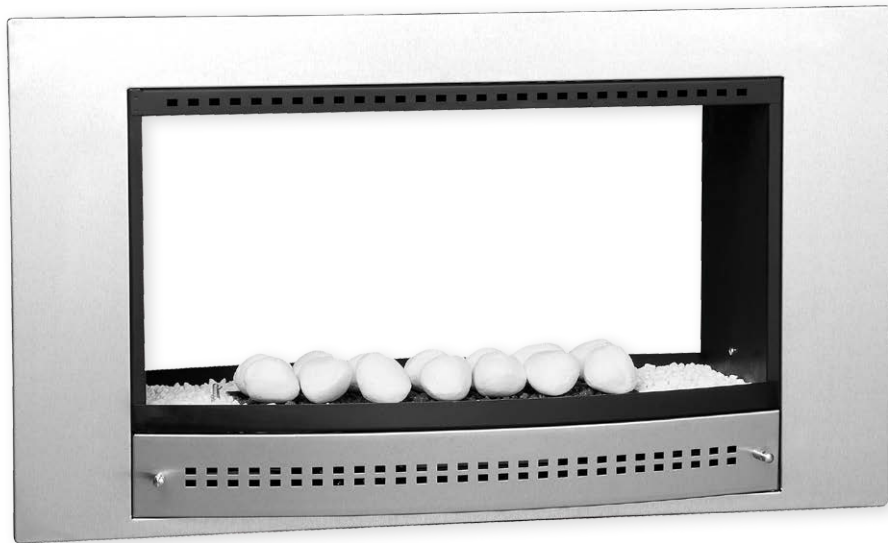

## FIREPLACE FINISHES

Stainless Frame  
Tiled Back



Stainless Frame  
Plain Back




## BURNER FINISHES


White Ceramic  
Pebbles




Black Ceramic  
Coals




Aztec Gold  
Glass




Azure Blue  
Glass



Crystal Clear  
Glass



Diamond Black  
Glass



## SPECIFICATIONS

Model	VFDS800	VFDS1000
Gas type	FIRE AND GAS <sup>+</sup> LPG or NAT	
Operating pressure	T: 021 8527173   F: 021 852 2381	
Min Regulator size	info@fireandgas.co.za   www.fireandgas.co.za	
Max. gas consumption	2 kg/hr	2 kg/hr
Max. mJ input	0.64 kg/hr	0.75 kg/hr
Max. kW input	36 mJ/hr	37.5 mJ/hr
Gas inlet connection	9 kW/hr	10.6 kW/hr
Ignition	Ø8mm comp.	Ø8mm comp.
ODS ( Pilot jet)	Piezo Spark	Piezo Spark
Coals	min 18.5% O <sub>2</sub>	min 18.5% O <sub>2</sub>
Pebbles	14	22
Min. Room size	12	18
Max. Room size	97m <sup>3</sup>	101m <sup>3</sup>
	399m <sup>3</sup>	416m <sup>3</sup>

## INSTALLATION INSTRUCTIONS

The Double Sided Fireplace is designed to fit through a cut out in a Double brick wall, and has clearance for +-10mm of screeding on either side of the wall.

The aperture in the wall needs the support of two load bearing lintels above the Double sided fireplace, before it can be installed.