




# Classic Fireplace

- VFP 800 -

The Classic Fireplace is a timeless addition to the home. Capable of heating an area in a large home of up to 108m<sup>2</sup>.

Merging elements of stainless steel, heat resistant coatings, tempered fireglass and tasteful design application, the Classic Fireplace creates a warm ambience in any setting.

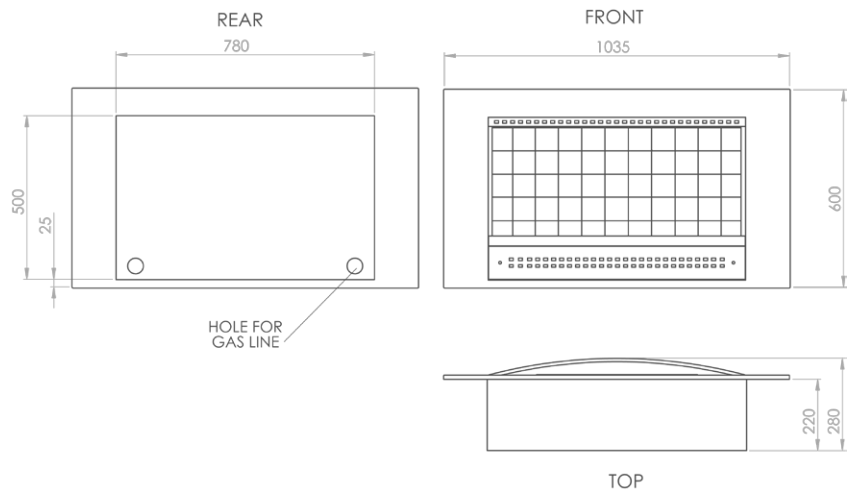

SAFETY, STYLE & QUALITY THAT LASTS

**CHAD-O-CHEF**  
Lifestyle products

Since 1983



# Classic Fireplace

- VFP 800 -



## SPECIFICATIONS

<i>Model</i>	<i>VFP800</i>
<i>Gas type</i>	<i>LPG / Nat.</i>
<i>Operating pressure</i>	<i>2.8 kPa</i>
<i>Min Regulator size</i>	<i>2 kg/hr</i>
<i>Max. gas consumption</i>	<i>0.64 kg/hr</i>
<i>Max. mJ input</i>	<i>36 mJ/hr</i>
<i>Max. kW input</i>	<i>9 kW/hr</i>
<i>Gas inlet connection</i>	<i>Ø8mm comp.</i>
<i>Ignition</i>	<i>Piezo Spark</i>
<i>ODS ( Pilot jet)</i>	<i>min 18.5% O2</i>
<i>Coals</i>	<i>14</i>
<i>Pebbles</i>	<i>12</i>
<i>Min. Room size</i>	<i>97m<sup>3</sup></i>
<i>Max. Room size</i>	<i>399m<sup>3</sup></i>

## INSTALLATION INSTRUCTIONS

The Classic Fireplace is best installed into a 250-300mm deep aperture in a wall, in a Single sided orientation. The aperture in the wall needs the support of a load bearing lintel above the Classic fireplace, before it can be installed.

There are two holes in the Stainless Steel body of the Classic Fireplace for a gas line to be easily installed from behind.

### FIREPLACE FINISHES

Stainless Frame  
Tiled Back



Stainless Frame  
Plain Back



Black Frame  
Tiled Back



Black Frame  
Plain Back




### BURNER FINISHES


White Ceramic  
Pebbles




Black Ceramic  
Coals




Aztec Gold  
Glass



Azure Blue  
Glass



Crystal Clear  
Glass



Diamond Black  
Glass

